

# DEMOLITION GRAB


## AG3535

**DMS**  
DMS Technologie GmbH

### TECHNICAL DATA

|                                  |       |       |
|----------------------------------|-------|-------|
| Excavator size-class             | [t]   | 2-3,5 |
| Weight (without rotator)         | [kg]  | 119   |
| Rotator weight                   | [kg]  | 29    |
| Operating pressure gripping max. | [bar] | 250   |
| Operating pressure rotation max. | [bar] | 250   |
| Closing force                    | [kN]  | 16    |
| Torque                           | [Nm]  | 1200  |
| Capacity                         | [l]   | 55    |
| Rec. litre capacity rotation     | [l]   | 6-25  |
| Rec. litre capacity gripping     | [l]   | 25-45 |

### TECHNICAL ILLUSTRATION

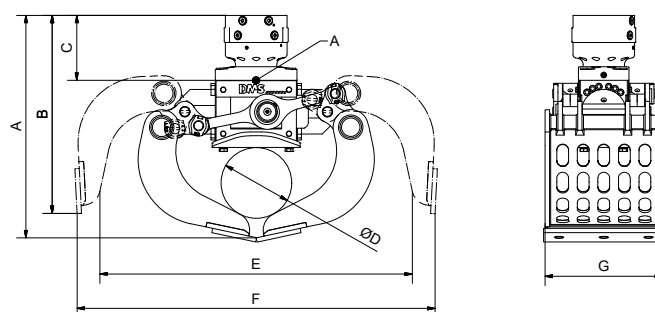

|             |      |       |             |      |     |
|-------------|------|-------|-------------|------|-----|
| Dimension A | [mm] | 634   | Dimension E | [mm] | 863 |
| Dimension B | [mm] | 560   | Dimension F | [mm] | 993 |
| Dimension C | [mm] | 188   | Dimension G | [mm] | 350 |
| Dimension D | [mm] | Ø 200 |             |      |     |

### AVAILABLE ACCESSORIES

- / Softgrip in combination with tooth conversion kit
- / Pipegrip in combination with tooth conversion kit
- / Tooth Conversion Kit
- / Adapter for other quick coupling systems upon request
- / Adapter flange for custom solution
- / Bolt-on adapter for quick coupling system Lehnhoff MS/HS

### SCOPE OF DELIVERY

- / Grab including shells
- / Bolt-on cutting edges
- / Rotator

You can find more information and a 3D preview at [www.dms-tec.de](http://www.dms-tec.de)

