

DIGGING GRAB


GL6040

DMS
DMS Technologie GmbH

TECHNICAL DATA

| | | |
|----------------------------------|---------|-------|
| Excavator size-class | [t] | 3,5-6 |
| Weight (without rotator) | [kg] | 199 |
| Rotator weight | [kg] | 52 |
| Operating pressure gripping max. | [bar] | 250 |
| Operating pressure rotation max. | [bar] | 250 |
| Closing force | [kN] | 20 |
| Torque | [Nm] | 2500 |
| Capacity | [l] | 70 |
| Number of teeth | | 3 |
| Rec. litre capacity rotation | [l/min] | 15-25 |
| Rec. litre capacity gripping | [l/min] | 30-45 |

TECHNICAL ILLUSTRATION

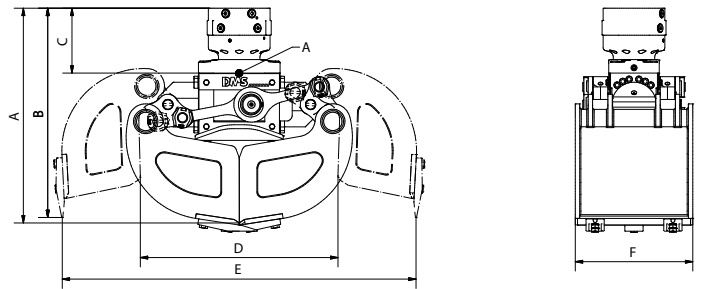

| | | | | | |
|-------------|------|-----|-------------|------|------|
| Dimension A | [mm] | 731 | Dimension E | [mm] | 1205 |
| Dimension B | [mm] | 713 | Dimension F | [mm] | 400 |
| Dimension C | [mm] | 221 | | | |
| Dimension D | [mm] | 673 | | | |

AVAILABLE ACCESSORIES

- / Softgrip
- / Pipegrip
- / Adapter for other quick coupling systems upon request
- / Adapter flange for custom solution
- / Bolt-on adapter for quick coupling system Lehnhoff MS/HS

SCOPE OF DELIVERY

- / Grab including shells
- / Bolt-on excavator teeth
- / Rotator

You can find more information and a 3D preview at www.dms-tec.de

